

描述 / Descriptions

TO-252 塑封封装 SiC N 沟道 MOS 场效应管。

SiC N-CHANNEL MOSFET in a TO-252 Plastic Package.

特征 / Features

$V_{DS}=800V$; $I_D=7A$



$R_{DS(on)}@15V \leq 650m\Omega$ (Type. 500m Ω)

$R_{DS(on)}@18V \leq 600m\Omega$ (Type. 378m Ω)

用途 / Applications

LED 驱动电源、PD 快充充电器、PC 电源适配器、空调、电动自行车充电器。

LED driver, PD charger, PC adapter, Air-conditioning, E-bike charger.

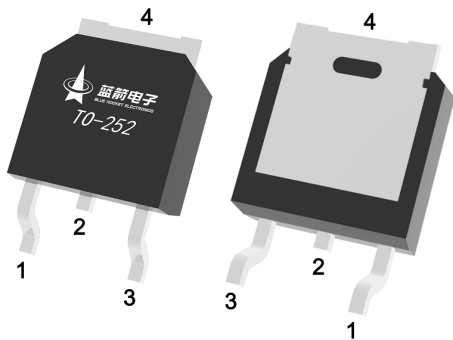内部等效电路 / Equivalent Circuit**引脚排列 / Pinning**

PIN1 : G

PIN 2 : D

PIN 3 : S

PIN 4 : D

印章代码 / Marking

见印章说明。

See Marking Instructions.

极限参数 / Absolute Maximum Ratings(Tc=25°C)

参数 Parameter	符号 Symbol	数值 Rating	单位 Unit
Drain-Source Voltage	V_{DSS}	800	V
Continuous DC Drain Current for $R_{th(j-c,typ.)}$, Limited by $T_{VJ(max)}$	$I_D(Tc=25^{\circ}C)$	7	A
	$I_D(Tc=100^{\circ}C)$	5.7	A
Peak Drain Current, tp Limited by $T_{VJ(max)}$	I_{DM}	12	A
Gate-Source Max Voltage	$V_{GS,max}$	-10/+22	V
Gate-Source Operate Voltage	$V_{GS,op}$	0/+15	V
Single Pulse Avalanche Energy	E_{AS}	10.2	mJ
Power Dissipation or $R_{th(j-c,typ.)}$	$P_D(Tc=25^{\circ}C)$	39	W
Operating and Storage Temperature Range	T_{VJ}, T_{STG}	-55 to 175	°C
MOSFET/Body Diode Junction-Case Thermal Resistance	$R_{th(j-c)}$	3.85	°C/W

电性能参数 / Electrical Characteristics(Tc=25°C)

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V$ $I_D=1mA$	800			V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=3.5mA$	3		5	V
Drain-Source Leakage Current	I_{DSS}	$V_{DS}=800V$ $V_{GS}=0V$		0.1	20	μA
Gate-Source Leakage Current	I_{GSS}	$V_{GS}=22V$ $V_{DS}=0V$			250	nA
Source-Gate Leakage Current	I_{SGS}	$V_{GS}=-10V$ $V_{DS}=0V$			250	nA
Drain-Source On-State Resistance	$R_{DS(on)}$	$V_{GS}=15V$ $I_D=4A$		500	650	mΩ
		$V_{GS}=15V$ $I_D=4A$ $T_{VJ}=175^{\circ}C$		509		
		$V_{GS}=18V$ $I_D=4A$		378	600	
		$V_{GS}=18V$ $I_D=4A$ $T_{VJ}=175^{\circ}C$		454		
Body Diode Forward Voltage	V_{SD}	$V_{GS}=0V$ $I_S=2A$		3.8		V
Continuous DC Source Current	I_S			6		A
Peak Reverse Drain Current	I_{SM}			12		A
Reverse Recovery Time	t_{rr}	$V_{GS}=0V$, $I_{SD}=4A$, $V_R=400V$, $di/dt=1.1kA/us$		7.9		ns
Reverse Recovery Charge	Q_{rr}			20		nC
Peak Reverse Recovery Current	I_{rrm}			4.2		A
Reverse Recovery Energy	E_{rr}			0.19		μJ

电性能参数 / Electrical Characteristics(Tc=25°C)

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Turn-On Delay Time	$t_{d(on)}$	$V_{GS}=0/15V$ $L=600\mu H$ $V_{DD}=400V$ $I_D=4A$ $R_g=10\Omega$		16.1		ns
Turn-On Rise Time	t_r			13.9		
Turn-Off Delay Time	$t_{d(off)}$			13.3		
Turn-Off Fall Time	t_f			13.7		
Turn-On Switching Loss	E_{on}			41.2		μJ
Turn-Off Switching Loss	E_{off}			3.1		
Total Switching Energy	E_{tot}			44.3		
Gate resistance	R_g	$V_{AC}=25mV$ $f=1MHz$		35		Ω
Input Capacitance	C_{iss}	$V_{DS}=400V$ $V_{GS}=0V$ $f=1MHz$		149		pF
Output Capacitance	C_{oss}			11		
Reverse Transfer Capacitance	C_{rss}			0.8		
Total Gate Charge	Q_g	$V_{GS}=0/15V,$ $V_{DS}=400V,$ $I_D=4A$		6.7		nC
Gate Source Charge	Q_{gs}			3.0		
Gate Drain Charge	Q_{gd}			1.1		

电参数曲线图 / Electrical Characteristic Curve

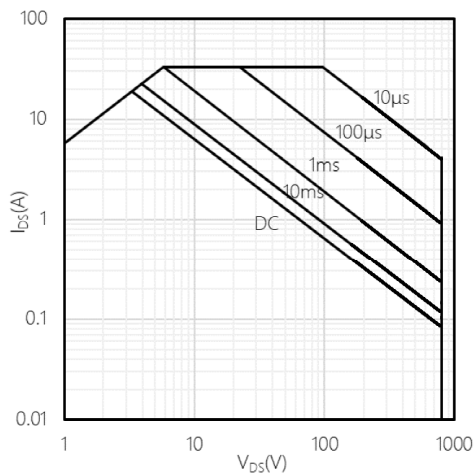


Fig1. Safe operating area (SOA)

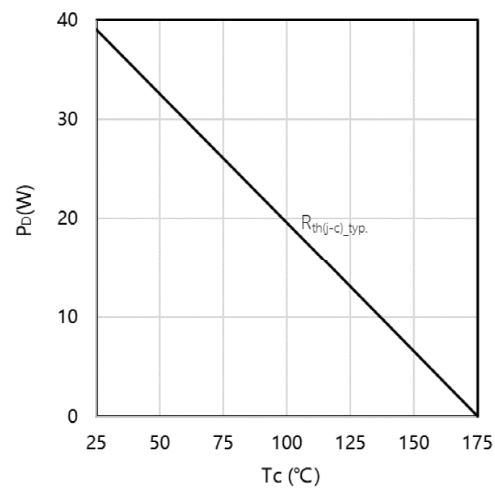


Fig2. Power dissipation

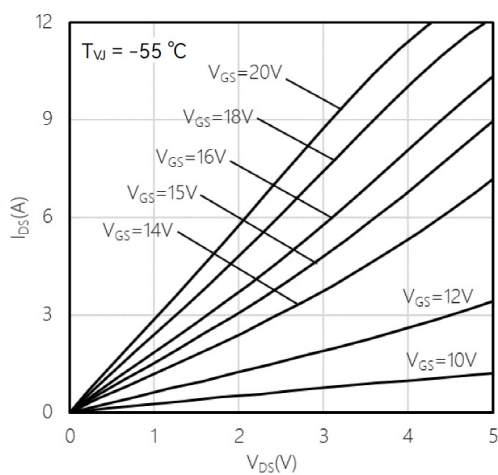


Fig3. Typical output characteristic

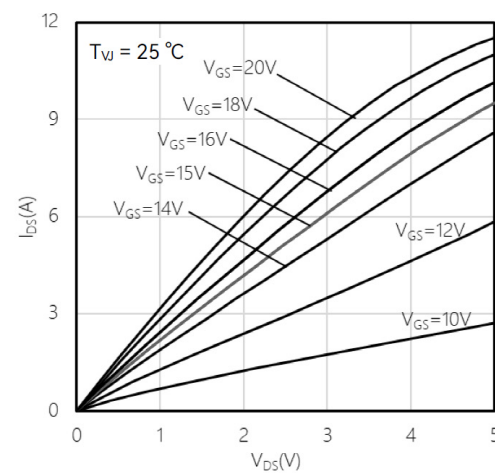


Fig4. Typical output characteristic

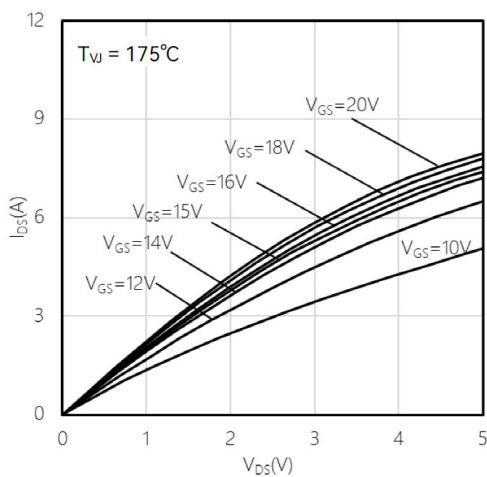


Fig5. Typical output characteristic

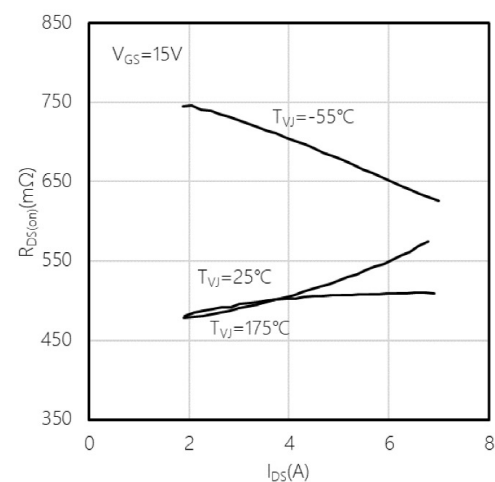


Fig6. Typical on-state resistance as a function of drain current

电参数曲线图 / Electrical Characteristic Curve

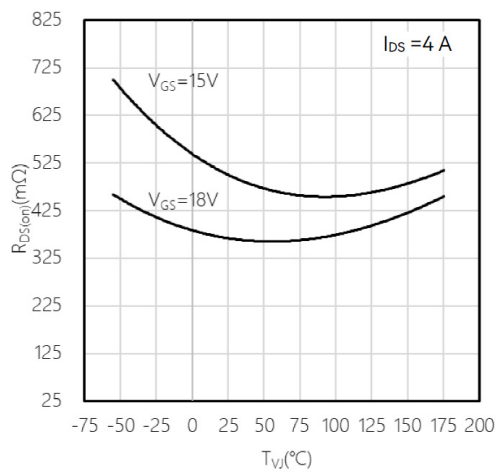


Fig7. Typical on-state resistance as a function of temperature

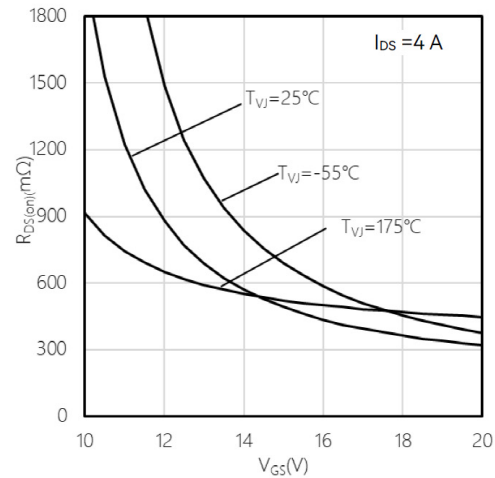


Fig8. Typical on-state resistance as a function of V_GS

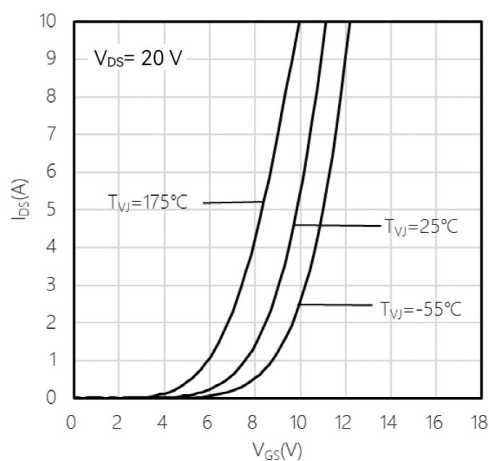


Fig9. Typical transfer characteristic

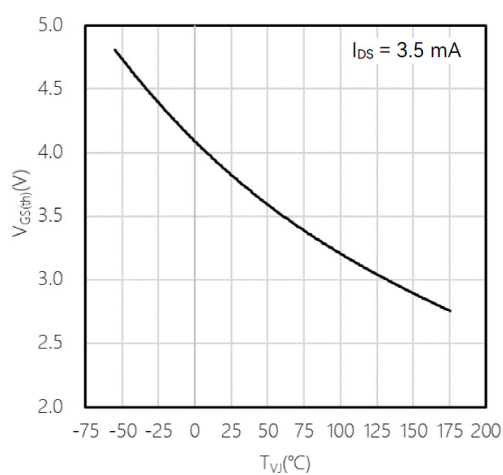


Fig10. Typical gate-source threshold voltage as a function of junction temperature

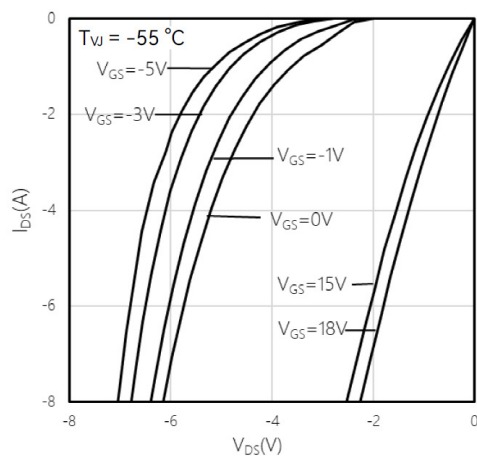


Fig11. Typical reverse drain current as function of reverse drain voltage

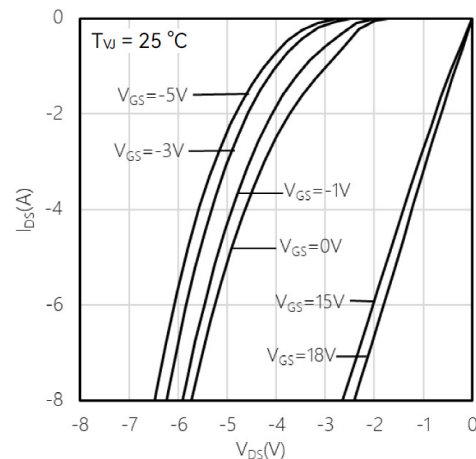


Fig12. Typical reverse drain current as function of reverse drain voltage

电参数曲线图 / Electrical Characteristic Curve

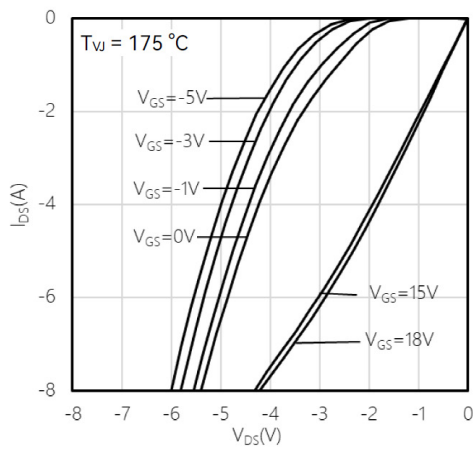


Fig13. Typical reverse drain current as function of reverse drain voltage

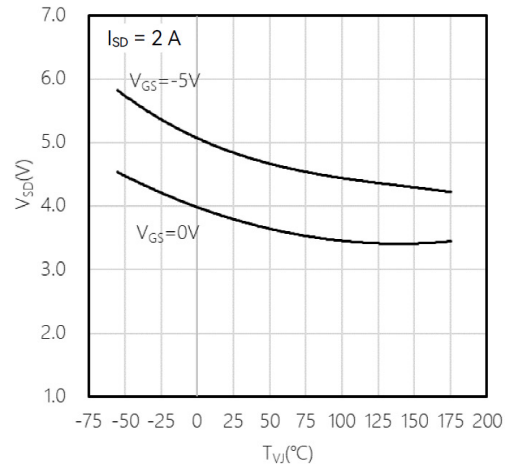


Fig14. Typical reverse drain voltage as function of junction temperature

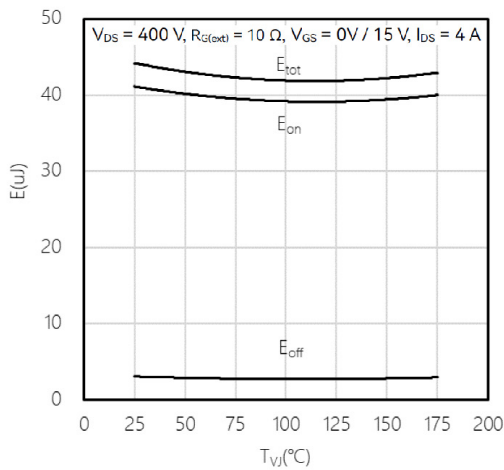


Fig15. Typical switching energy as a function of junction temperature, 2nd device own body diode: VGS = 0V

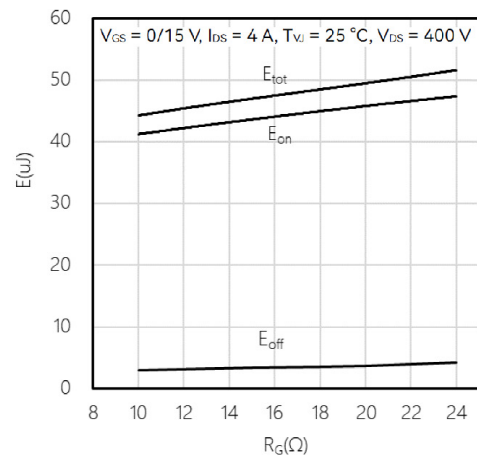


Fig16. Typical switching energy losses as a function of gate resistance, 2nd device own body diode: VGS = 0V

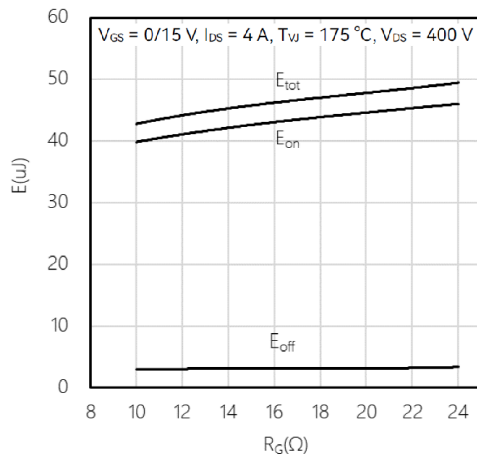


Fig17. Typical switching energy losses as a function of gate resistance, 2nd device own body diode: VGS = 0V

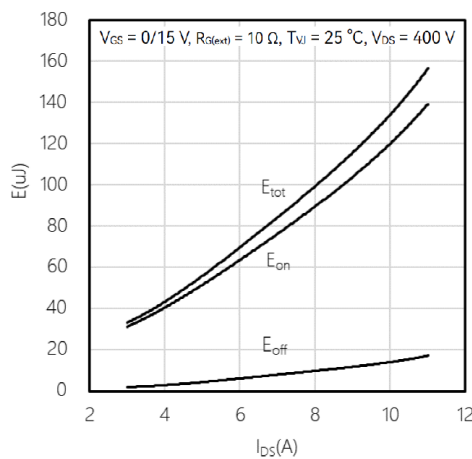


Fig18. Typical switching energy losses as a function of Ids, 2nd device own body diode: VGS = 0V

电参数曲线图 / Electrical Characteristic Curve

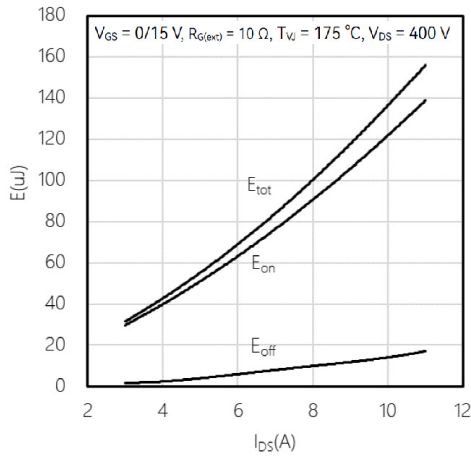


Fig19. Typical switching energy losses as a function of I_{DS} , 2nd device own body diode: $V_{GS} = 0V$

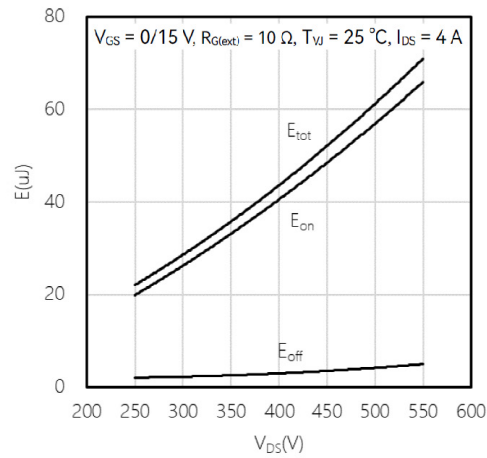


Fig20. Typical switching energy losses as a function of V_{DS} , 2nd device own body diode: $V_{GS} = 0V$

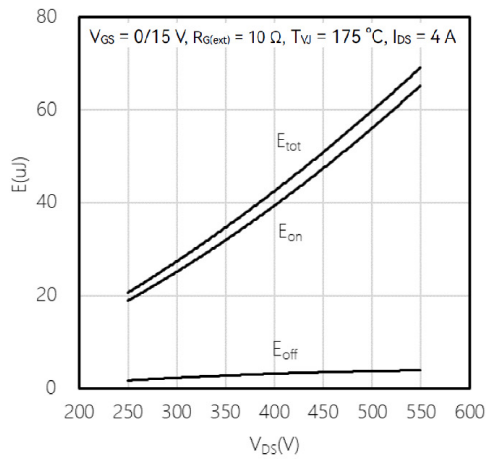


Fig21. Typical switching energy losses as a function of V_{DS} , 2nd device own body diode: $V_{GS} = 0V$

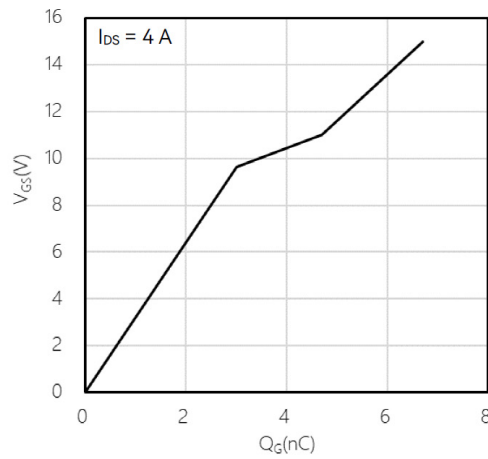


Fig22. Typical gate charge

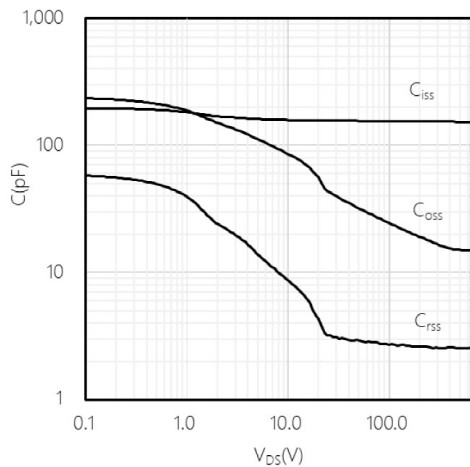


Fig23. Typical capacitance as a function of drain-source voltage

电参数曲线图 / Electrical Characteristic Curve


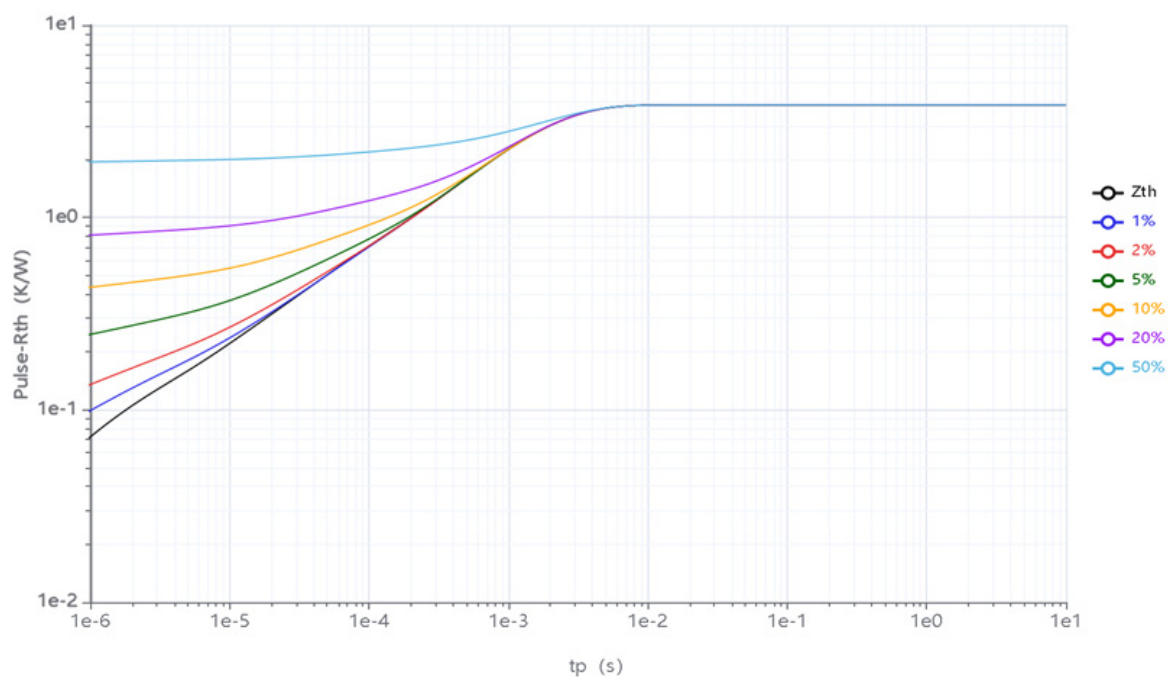


Fig24. Transient thermal resistance (MOSFET)


外形尺寸图 / Package Dimensions

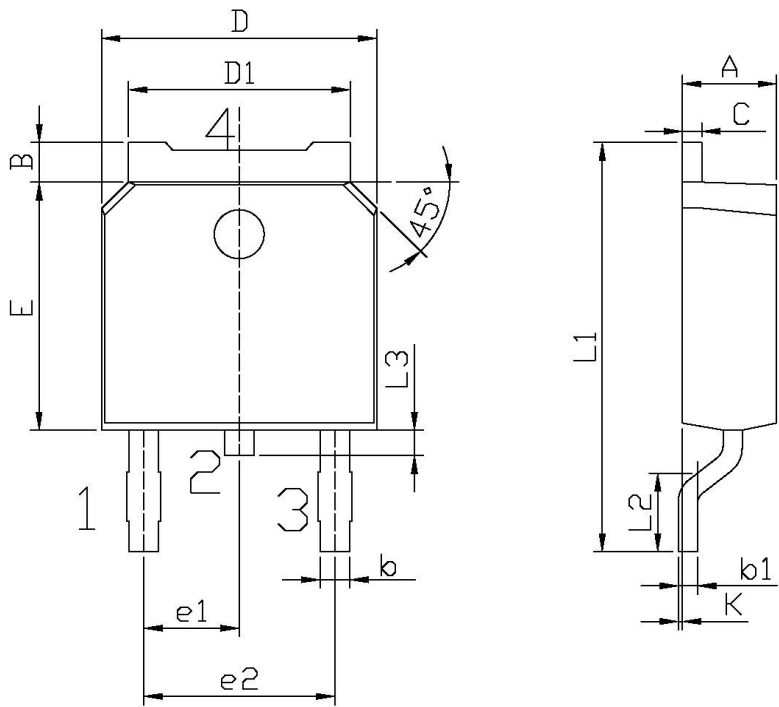

单位：mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	2.20	2.40	E	5.95	6.25
B	0.95	1.25	e1	2.24	2.34
b	0.70	0.90	e2	4.43	4.73
b1	0.45	0.55	L1	9.85	10.35
C	0.45	0.55	L2	1.70	2.00
D	6.45	6.75	L3	0.60	0.90
D1	5.10	5.50	K	0.00	0.10

T0-252

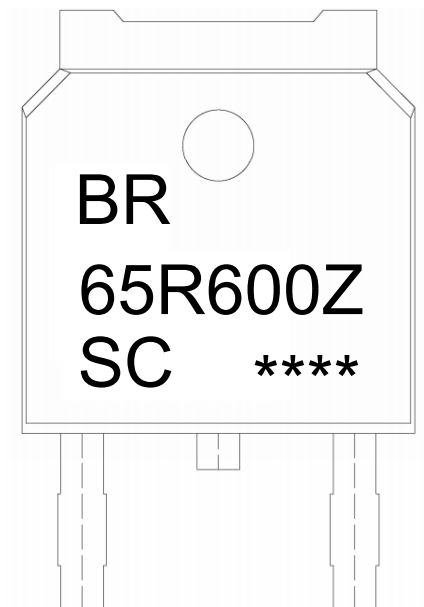**印章说明 / Marking Instructions**

说明：

BR： 为公司代码

65R600Z： 为型号代码

SC： 为碳化硅

****： 为生产批号代码，随生产批号变化


Note:

BR: Company Code

65R600Z: Product Type Code

SC: SiC

****: Lot No. Code, code change with Lot No.

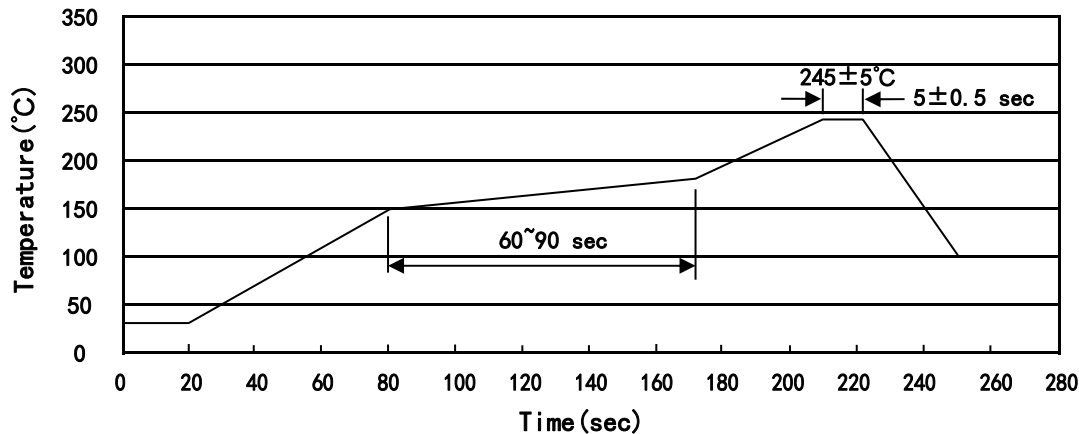回流焊温度曲线图(无铅) / Temperature Profile for IR Reflow Soldering(Pb-Free)


说明：

- 1、预热温度 150~180°C，时间 60~90sec；
- 2、峰值温度 245±5°C，时间持续为 5±0.5sec；
- 3、焊接制程冷却速度为 2~10°C/sec。

Note:

- 1.Preheating:150~180°C, Time:60~90sec.
- 2.Peak Temp.:245±5°C, Duration:5±0.5sec.
3. Cooling Speed: 2~10°C/sec.

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

温度：260±5°C

时间：10±1 sec.

Temp.:260±5°C

Time:10±1 sec

包装规格 / Packaging SPEC.

卷盘包装 / REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
TO-252	2,500	2	5,000	6	30,000	13" ×16	360×360×50	380×335×366

套管包装 / TUBE

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-251/252	75	48	3,600	5	18,000	526×20.5×5.25	555×164×50	575×290×180

使用说明 / Notices

本文档中提供的所有信息均受法律免责声明的约束。

All information provided in this document is subject to legal disclaimers.